

## Upgrading your FG7008GR(AC)'s Firmware


### YOU CAN DOWNLOAD THE LATEST FIRMWARE FROM

<http://www.aztech.com/commercial/odm-oem/fiber-broadband-gateway/fg7008gr-ac>

**NOTE: IT IS IMPORTANT TO ONLY USE OFFICIALLY RELEASED AZTECH FIRMWARE.**  
These can be downloaded from the Aztech Support Website link seen above.

### STEP 1

Ensure to follow the correct setup provided below.

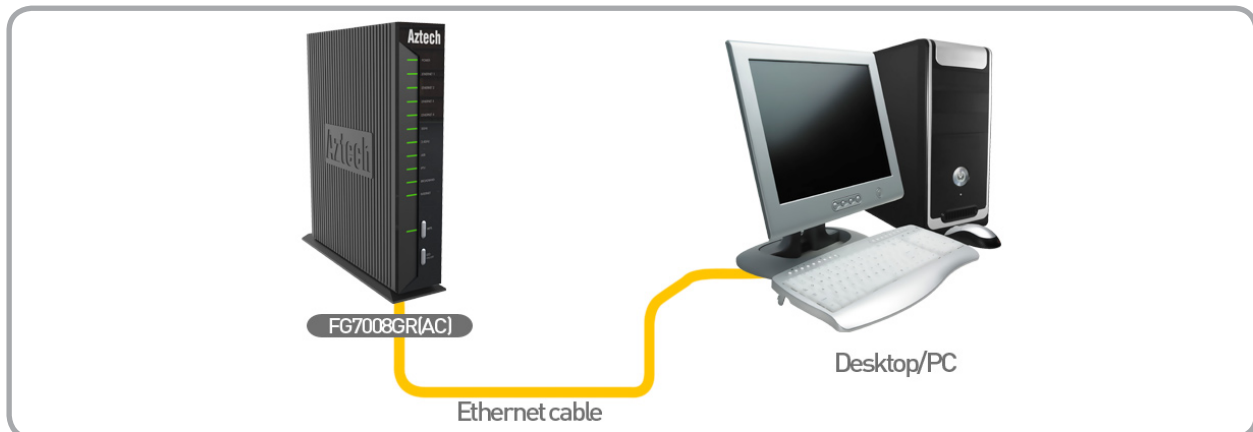

### STEP 2

On your Desktop / PC, launch any Web Browser (e.g. Internet Explorer, Google Chrome) then type in **192.168.1.254** on the address bar to access the Web User Interface of your FG7008GR(AC).

### STEP 3

On the Web User Interface, go to **Device Administration > Firmware Upgrade**. You would then be redirected to the firmware upgrade page of your FG7008GR(AC).



### STEP 4

Click the **Choose File** button and locate the firmware upgrade file you have downloaded from the Aztech Support Site. You may then click the **Update Firmware** button to confirm and start the firmware upgrade process.

**NOTE : PLEASE PATIENTLY WAIT FOR THE FIRMWARE UPGRADE PROCESS TO FINISH.**  
 The firmware upgrade process would approximately take 10 minutes to complete.  
 During the process, ensure that the FG7008GR(AC) LAN CABLE AND POWER ADAPTER  
 WOULD NOT BE UNPLUGGED OR TURNED OFF.

### STEP 5

Perform a factory default reset to ensure that all new improvements are successfully applied upon completing the firmware upgrade.


On the Web User Interface, go to **Device Administration > Restore Default**. You would then be redirected to the restore default page of your FG7008GR(AC).

### STEP 6

Click **Restore Default Setting**

## STEP 7

Click **OK** to confirm.

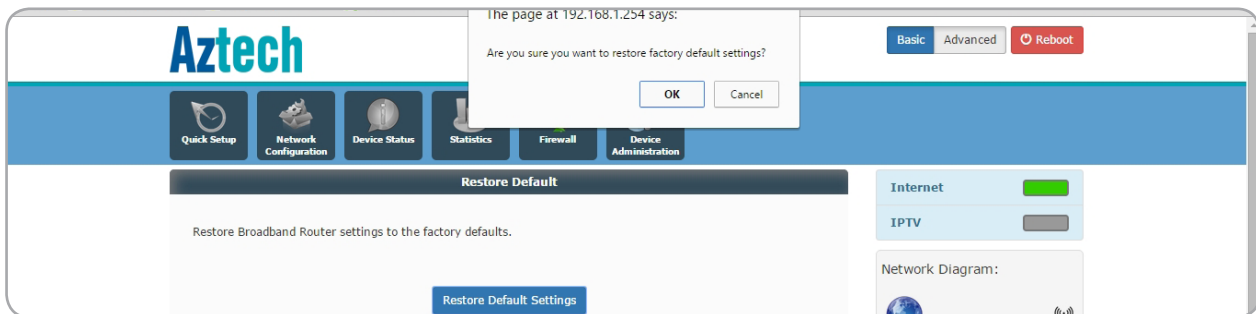

Note: The factory default reset process would approximately take 3 minutes to complete.

## STEP 8

To confirm if the firmware upgrade process has been successful, on the **Quick Setup** menu, under the **Device Info** section, check the Firmware Version. The Firmware Version number should now be: **322.6s.3-007**, as seen below.

The screenshot shows the "Device Info" section of the Aztech web interface. The table below lists the device information:

- Device Info -	
Model	FG7008GR(AC)
Board ID	963138REF_P402
Base MAC Address	00:26:75:CC:6A:FD
Serial No	1599144700382
Firmware Version	322.6s.3-007
Software Version	1.1.1.1